

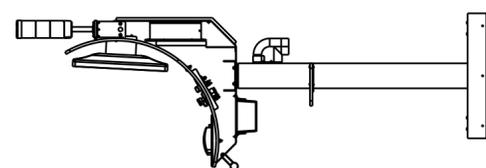
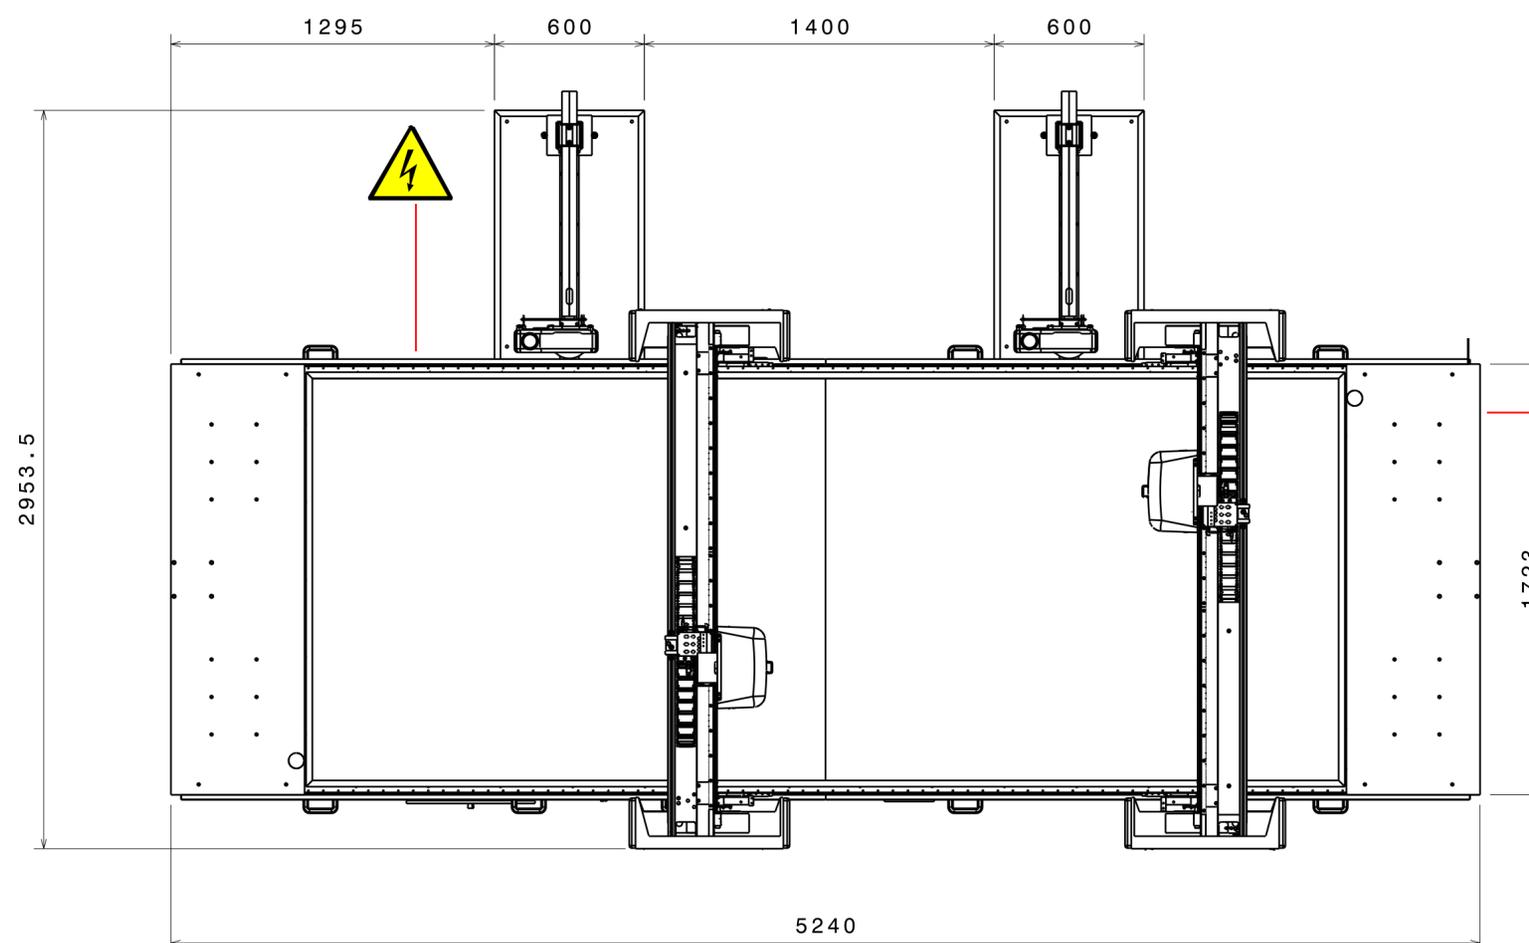
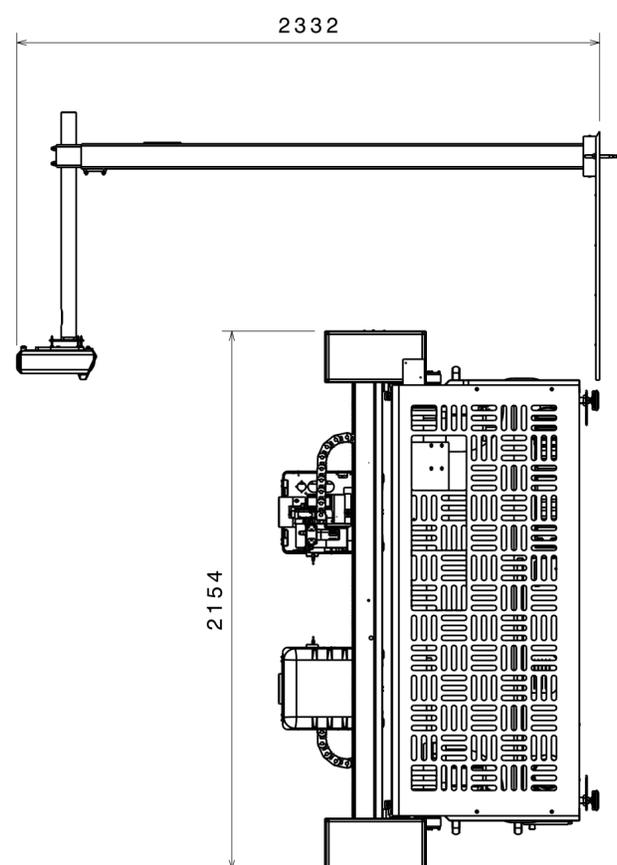


14mm ext. 12mm int.
pneumatic tube
With 2 pneumatic chucks
1540 lt/min
9 bar
Without pneumatic chuck
100 lt/min
7 bar



MODEL	FXC 2H 4015/S 1P		FXC 2H 4015/S UP 1P		FXC 2H 4015/S 2P		FXC 2H 4015/S UP 2P	
WEIGHT	2150 Kg		2290 Kg		2300 Kg		2440 Kg	
RATED VOLTAGE	380...415 V	220 V	380...415 V	220 V	380...415 V	220 V	380...415 V	220 V
PHASES	3 + N	3	3 + N	3	3 + N	3	3 + N	3
NOMINAL FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
NOMINAL CURRENT	27 A	47 A	27 A	47 A	49,5 A	87 A	49,5 A	87 A
NOMINAL POWER	17,1 kW	17,1 kW	17,1 kW	17,1 kW	31,7 kW	31,5 kW	31,7 kW	31,5 kW

It is the user's responsibility to ensure the required connection requirements

Thermal switcher required: 0.3 A in "D" curve