

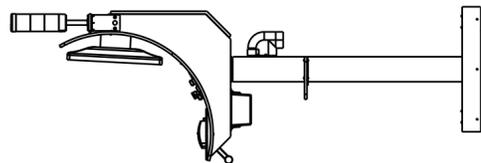
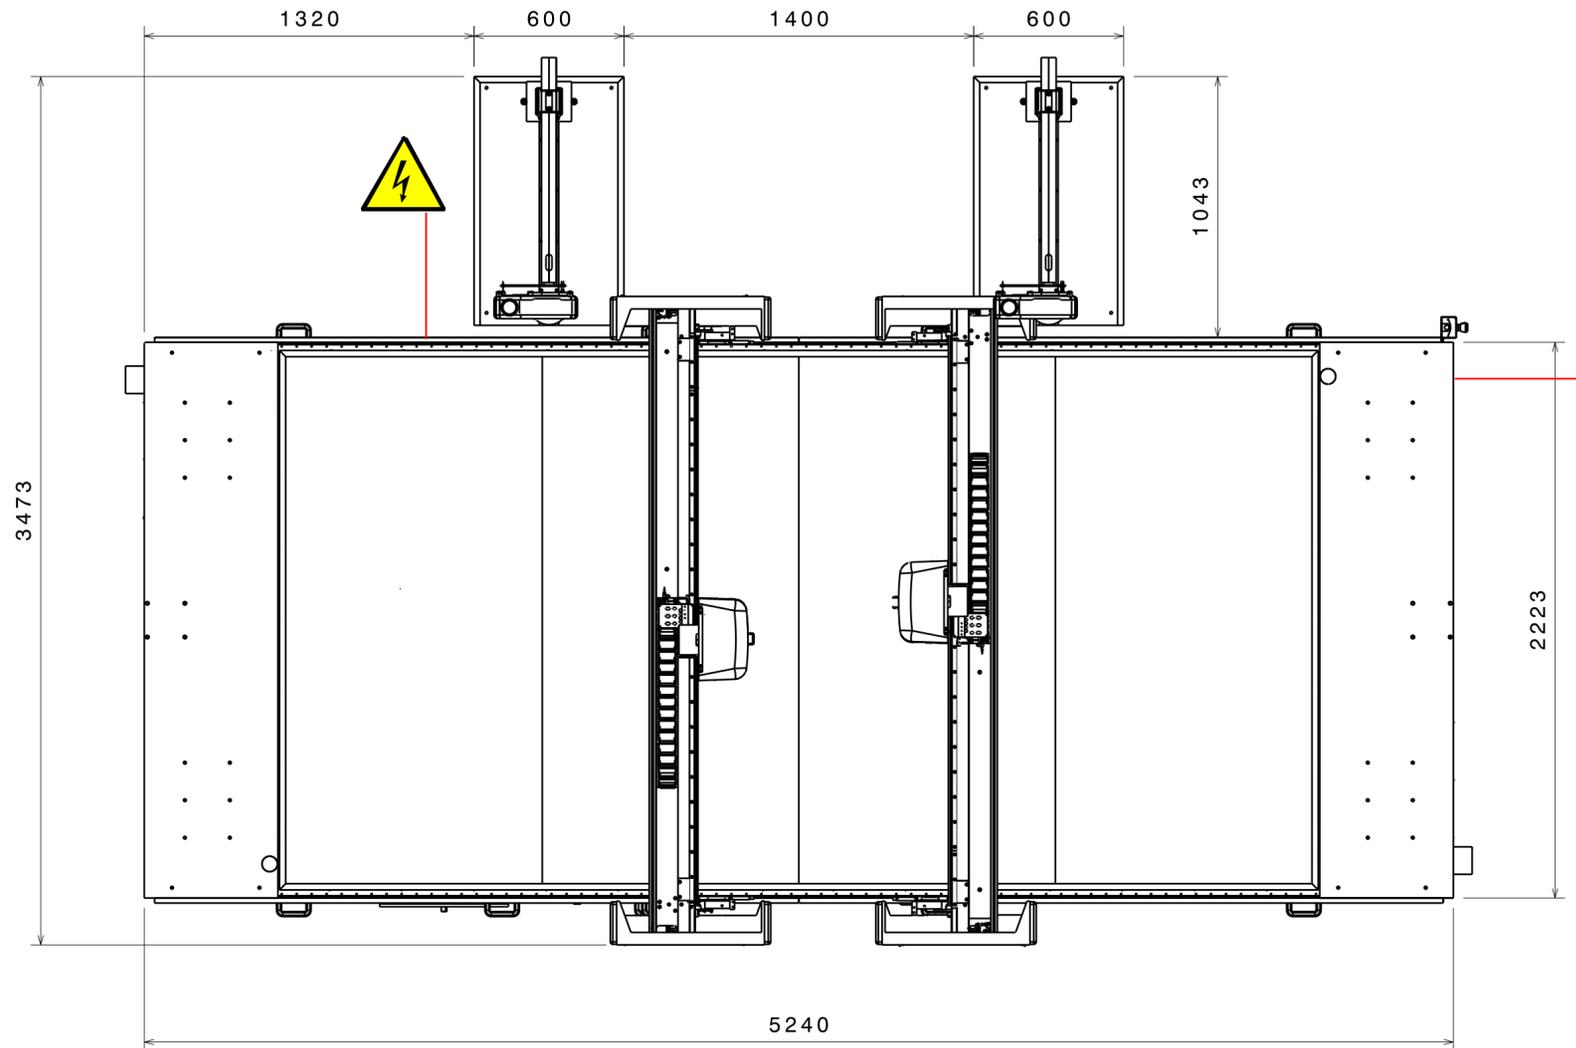
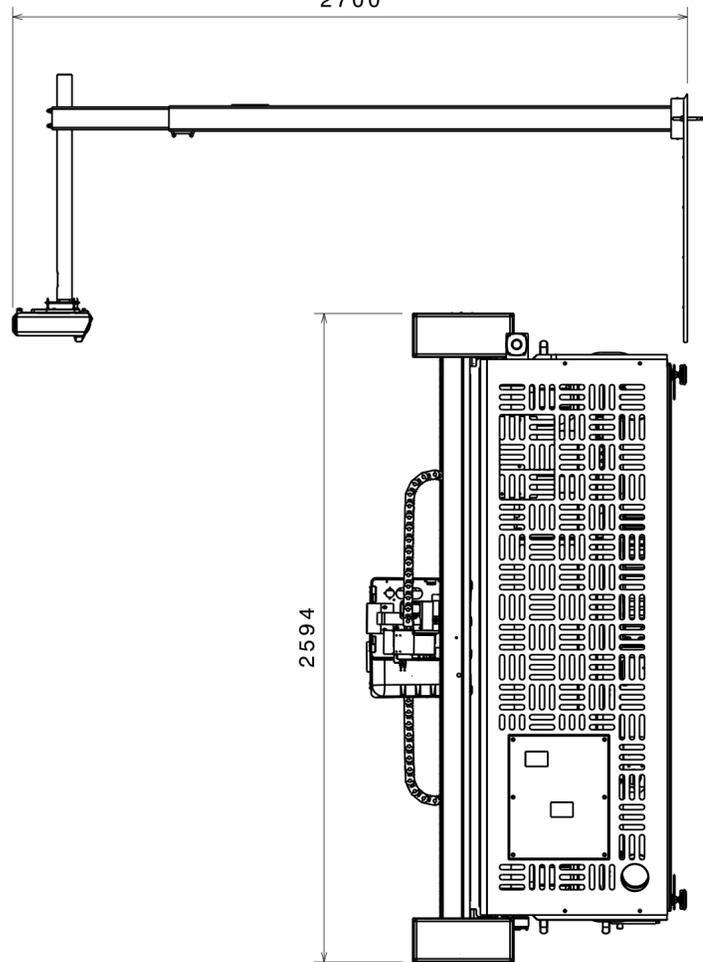
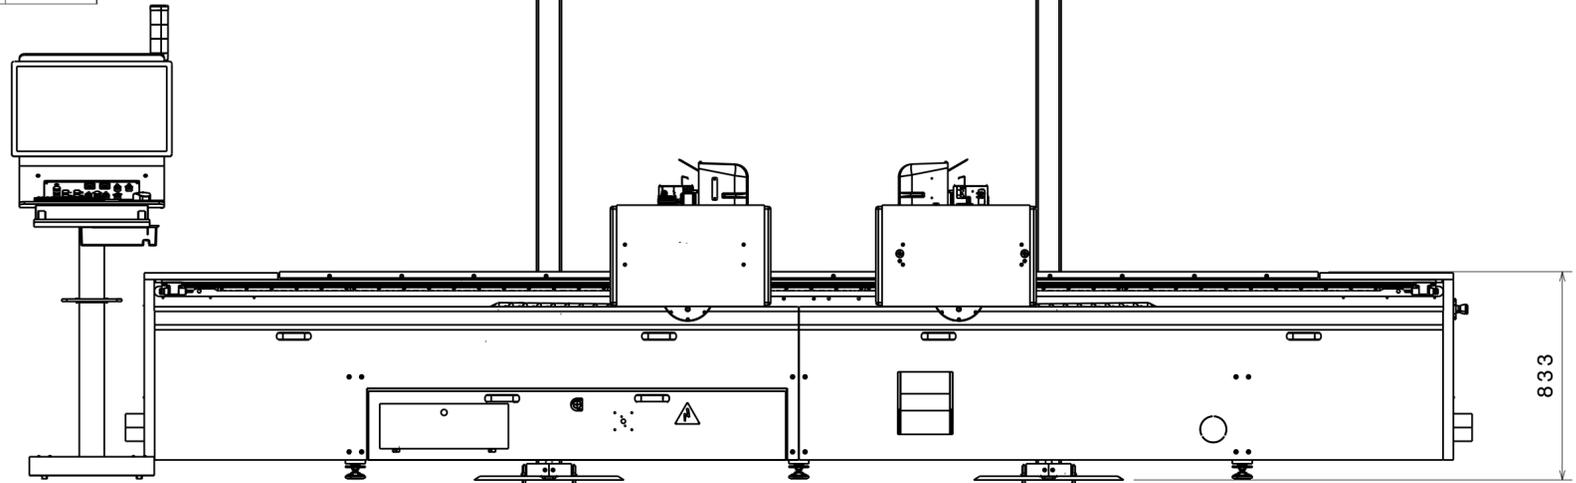


MODEL	FXC 2H 4020/S 1P		FXC 2H 4020/S UP 1P		FXC 2H 4020/S 2P		FXC 2H 4020/S UP 2P	
WEIGHT	2415 Kg		2735 Kg		2565 Kg		2885 Kg	
RATED VOLTAGE	380...415 V	220 V	380...415 V	220 V	380...415 V	220 V	380...415 V	220 V
PHASES	3 + N	3	3 + N	3	3 + N	3	3 + N	3
NOMINAL FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
NOMINAL CURRENT	27 A	47 A	27 A	47 A	49,5 A	87 A	49,5 A	87 A
NOMINAL POWER	17,1 kW	17,1 kW	17,1 kW	17,1 kW	31,7 kW	31,5 kW	31,7 kW	31,5 kW

Thermal switcher required: 0.3 A in "D" curve

Installation site

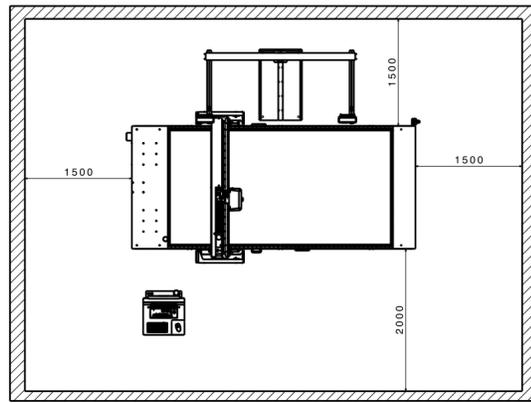

14mm ext. 12mm int.
pneumatic tube
With 2 pneumatic chucks
1540 lt/min
9 bar
Without pneumatic chuck
100 lt/min
7 bar

It is the user's responsibility to ensure the required connection requirements