




MODEL	FXC 3026/S 2P		FXC 3026/S UP 2P	
WEIGHT	2450 Kg		2870 Kg	
RATED VOLTAGE	380...415 V	220 V	380...415 V	220 V
PHASES	3 + N	3	3 + N	3
NOMINAL FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
NOMINAL CURRENT	49,5 A	87 A	49,5 A	87 A
NOMINAL POWER	31,7 kW	31,5kW	31,7 kW	31,5 kW

Thermal switcher required: 0.3 A in "D" curve

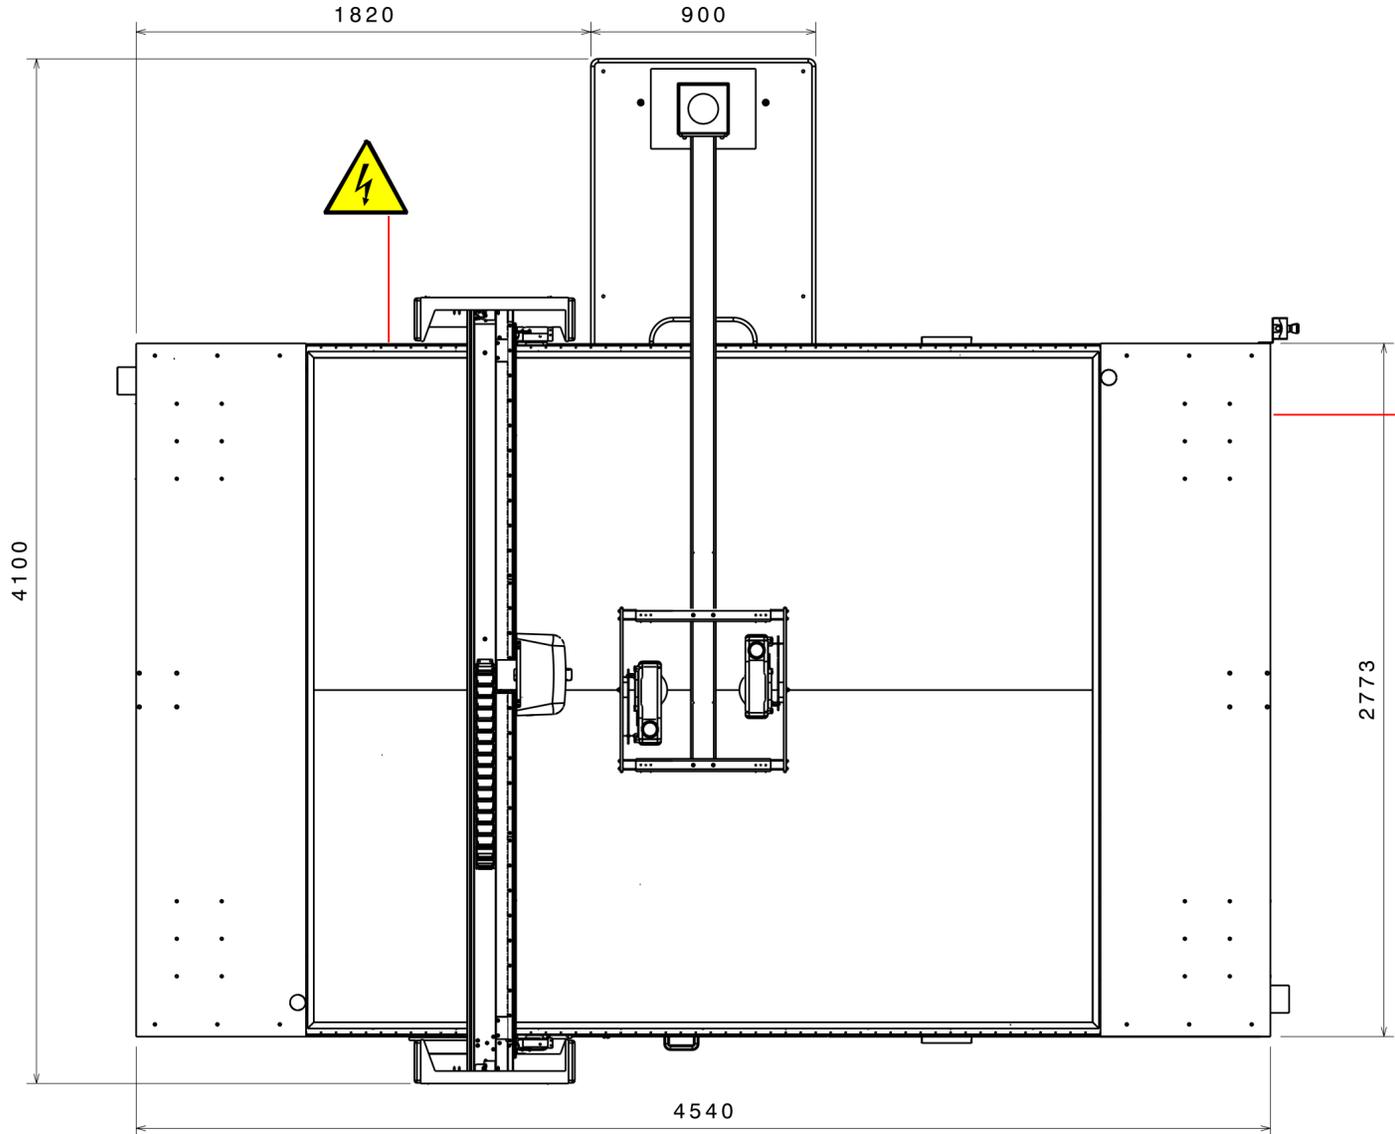

14mm ext. 12mm int.
pneumatic tube
With pneumatic chuck
770 lt/min
9 bar
Without pneumatic chuck
100 lt/min

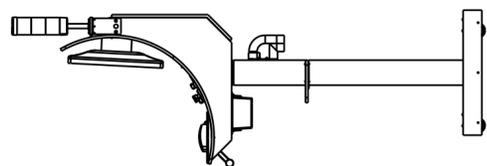

It is the user's responsibility to ensure the required connection requirements